




Features

- No pre-drilling necessary
- Attachment is screwed on and tightened directly
- Countersunk milling head prevents splitting of wooden strips and boards
- Stepless, millimetre-precise adjustment
- Tension-free installation possible

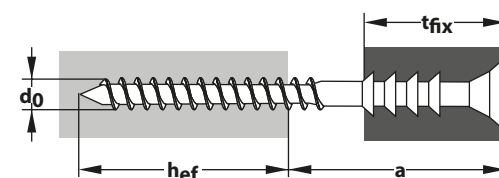

Pack	Item No.	Type	Content Plug	Content Screw	Screws Ø	Screws Length	Screws Drive	Drill Ø	Effective anchorage depth	Max. Spacing Building material	Thickness Fixing	Approval
	Distance		per pack	per pack	mm	mm	TX	d0 ø mm	hef ≥ mm	a ≤ mm	tfix ≤ mm	ETA
	090 101 02	6/60	-	100x	6	60	25	-	30	30	20	-
	090 101 03	6/70	-	100x	6	70	25	-	30	40	25	-
	090 101 04	6/80	-	100x	6	80	25	-	30	50	25	-
	090 101 06	6/100	-	100x	6	100	25	-	30	70	25	-
	090 101 08	6/120	-	100x	6	120	25	-	30	90	25	-
	090 101 10	6/145	-	100x	6	145	25	-	30	115	25	-





Description & Area of Application

- Made of galvanised, hardened steel
- Self-tapping woodscrew with spacer shank
- Object holder with countersunk milling head and TX25 drive



Processing & Installation

- Distance is set without plugs and pre-drilling, the wooden substructure is screwed directly to the wooden substrate
- The distance is continuously adjusted precise to the millimetre by turning the screw to the left
- Stand-off installation, wood on wood only

