


Plasterboard plug Spiral




Features

- Without pre-drilling in single-layer gypsum plasterboards
- No cracking of the surface due to special thread geometry
- In gypsum plasterboards high holding values up to 8 kg per fixing point
- PZ2 drive for simple installation

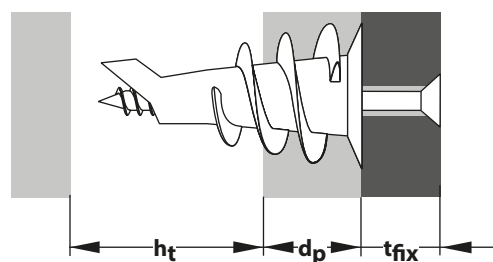

Pack	Item No.	Type	Content Plug	Content Screw	Plug Ø	Plug length	Screw Size	Drill Ø	Min. Cavity depth	Board thickness	Fixture Thickness	Approval
		Spiral	per pack	per pack	mm	mm	Ø mm	d ₀ Ø mm	h _t ≥ mm	d _p ≤ mm	t _{fix} ≤ mm	ETA
	068 100 231	32	50x	-	-	32	4.5	-	25*	20	-	-
		Spiral + screw	per pack	per pack	mm	mm	mm	d ₀ Ø mm	h _t ≥ mm	d _p ≤ mm	t _{fix} ≤ mm	ETA
	068 101 231	32 S	50x	50x	-	32	4.5 x 45	-	25*	20	13	-
		Spiral	per pack	per pack	mm	mm	Ø mm	d ₀ Ø mm	h _t ≥ mm	d _p ≤ mm	t _{fix} ≤ mm	ETA
	068 260 23	32	70x	-	-	32	4.5	-	25*	20	-	-
		Spiral	per pack	per pack	mm	mm	Ø mm	d ₀ Ø mm	h _t ≥ mm	d _p ≤ mm	t _{fix} ≤ mm	ETA
	068 700 231	32	10x	-	-	32	4.5	-	25*	20	-	-
		Spiral + screw	per pack	per pack	mm	mm	mm	d ₀ Ø mm	h _t ≥ mm	d _p ≤ mm	t _{fix} ≤ mm	ETA
	068 701 231	32 S	4x	4x	-	32	4.5 x 45	-	25*	20	13	-
* For 9.5 mm gypsum plasterboard. For other boards, 23 mm is sufficient.												
Pack	Item No.	Type	Content Plug	Content Hook	Plug Ø	Plug length	Hook	Drill Ø	Min. Cavity depth	Board thickness	Fixture Thickness	Approval
		Pirat Leslie	per pack	per pack	mm	mm	mm	d ₀ Ø mm	h _t ≥ mm	d _p ≤ mm	t _{fix} ≤ mm	ETA
	068 701 501	32	4x	4x	-	32	4.0 x 35	-	23	20	-	-

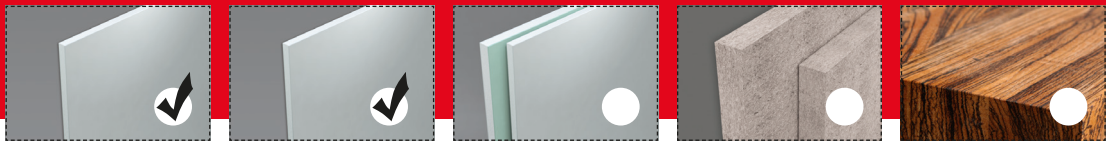

Spiral	Gypsum plasterboard 9.5 mm	Gypsum plasterboard 12.5 mm	Gypsum plasterboard 2x 12.5 mm	Gypsum fibreboard 12.5 mm	Wood chip / plywood board ≥ 10 mm
32	7 kg	8 kg	-	-	-

- For fixings in gypsum plasterboards, the holding value specifications of the board manufacturer must always be observed
- Approved plugs must be used for fixings where safety is of importance (see also www.tox.de/safety+loads)

Description & Area of Application

- Glass fibre reinforced gypsum plasterboard plug
- Reinforced drill tip for easy installation without additional setting tool
- For single layer gypsum plasterboards

Spiral + screw:

- Screw with PZ drive



Processing & Installation

- Centre punch the gypsum plasterboard using the centre point before screwing in
- Not suitable for gypsum fibreboards and tiled gypsum plasterboards
- Small footprint behind the panel due to short plug length
- Only use chipboard and panel screws with $\varnothing 4.5$ mm
- Minimum screw length = plug length 32 mm + fixture thickness
- Pre-positioned installation

