



Countersunk head with milling ribs

- for flush countersinking in hard gypsum fibreboards

PH2 drive

- the standard in drywall construction

Black phosphated

- high corrosion protection

Sharp needle tip

- for fast bite and easy installation in metal stud framing or wooden substructures

HiLo thread

- for high holding values and quick installation in metal stud framing up to 0.8 mm or wooden substructure



Features

- High ease of installation
- Phosphated surface
- Countersunk head



PH



1 x incl.



Pack	Item No.	Type D x L	Content	Ø	Length	Drive	Bit included	Approval
------	----------	------------	---------	---	--------	-------	--------------	----------

Gypsum Fibreboard Screws

FIBR	mm	per pack	mm	mm	+		ETA
142643213919	3.9 x 19	1000	3.9	19	PH 2	✓	-
142643213922	3.9 x 22	1000	3.9	22	PH 2	✓	-
142643213930	3.9 x 30	1000	3.9	30	PH 2	✓	-

Collated Gypsum Fibreboard Screws

FIBR	mm	per pack	mm	mm	+		ETA
142643253919	3.9 x 19	1000	3.9	19	PH 2	-	-
142643253930	3.9 x 30	1000	3.9	30	PH 2	-	-

Description & Area of Application



High corrosion protection thanks to black phosphating

Tested by 48h salt spray test

Countersunk head with milling ribs for clean and flush installation

HiLo thread for metal and wooden substructures

Collated professional version for many auto-feed screwdrivers

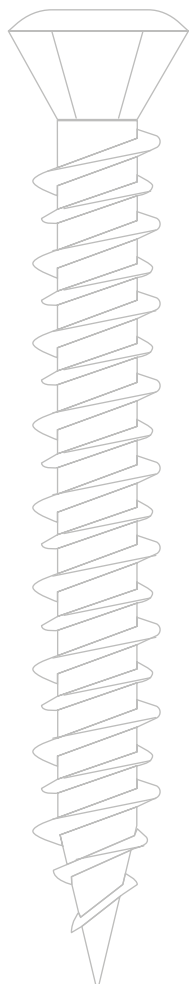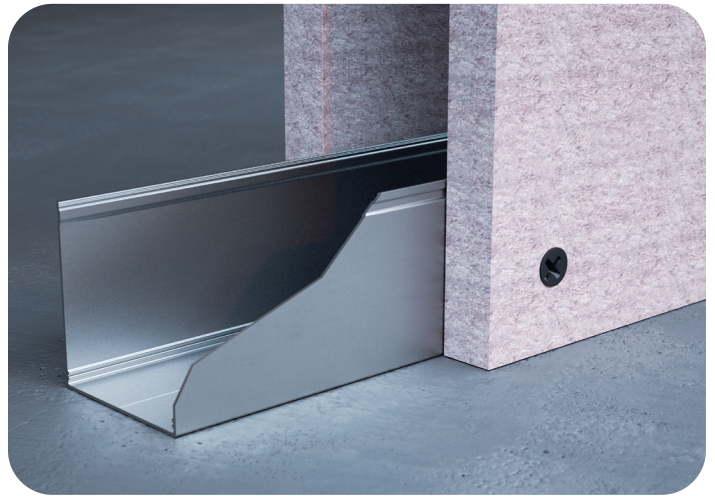

HiLo thread

Sharp
needle tip

