

Cavity hook plug Pirat Skippi




FOR PLASTERBOARD

Features

- Plug cap with anti-rotation lock prevents rotation in the building material
- Hook bolt can be loosened and tightened without removing the plug
- For single and double layer plasterboard, gypsum fibreboard and chipboard
- High holding values due to widespread anchoring on the back of the panel

Pack	Item No.	Type	Content Plug	Content Hook	Plug Ø	Plug length	Hook	Drill Ø	Min. Cavity depth	Board thickness	Hook length	Approval
	Pirat Skippi-L		per pack	per pack	mm	mm	mm	d_0 Ø mm	h_t ≥ mm	d_p mm	a ≤ mm	ETA
	035 101 651	M5 x 37	50x	50x	10	37	M5 x 52	10	37	6-13	6	-
	035 101 681	M6 x 52	25x	25x	12	52	M6 x 68	12	48	7-18	6	-
	035 101 691	M6 x 65	25x	25x	12	65	M6 x 81	12	51	17-32	6	-
	Pirat Skippi-L		per pack	per pack	mm	mm	mm	d_0 Ø mm	h_t ≥ mm	d_p mm	a ≤ mm	ETA
	035 701 651	M5 x 37	2x	2x	10	37	M5 x 52	10	37	6-13	6	-
	035 701 681	M6 x 52	2x	2x	12	52	M6 x 68	12	48	7-18	6	-
	035 701 691	M6 x 65	2x	2x	12	65	M6 x 81	12	51	17-32	6	-
	Pirat Skippi-XL		per pack	per pack	mm	mm	mm	d_0 Ø mm	h_t ≥ mm	d_p mm	a ≤ mm	ETA
	035 701 621	M5 x 52	2x	2x	10	52	M5 x 86	10	48	8-21	20	-
	035 701 641	M6 x 52	2x	2x	12	52	M6 x 86	12	48	7-18	20	-
	Pirat Skippi-S		per pack	per pack	mm	mm	mm	d_0 Ø mm	h_t ≥ mm	d_p mm	a ≤ mm	ETA
	035 701 561	M5 x 52	2x	2x	10	52	M5 x 89	10	48	7-18	14	-
	035 701 581	M6 x 52	2x	2x	12	52	M6 x 92	12	48	7-18	15	-
		Pirat Skippi-O		per pack	per pack	mm	mm	mm	d_0 Ø mm	h_t ≥ mm	d_p mm	a ≤ mm
035 701 521		M5 x 52	2x	2x	10	52	M5 x 89	10	48	7-18	14	-

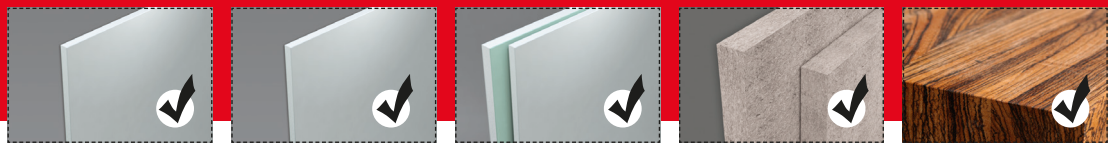

Pirat Skippi-L	Gypsum plasterboard 9.5 mm	Gypsum plasterboard 12.5 mm	Gypsum plasterboard 2x 12.5 mm	Gypsum fibreboard 12.5 mm	Wood chip / plywood board ≥ 10 mm
M5x37	15 kg	20 kg	-	30 kg	30 kg
M6x52	15 kg	20 kg	-	30 kg	30 kg
M6x65	-	-	35 kg	-	-
Pirat Skippi-XL	Gypsum plasterboard 9.5 mm	Gypsum plasterboard 12.5 mm	Gypsum plasterboard 2x 12.5 mm	Gypsum fibreboard 12.5 mm	Wood chip / plywood board ≥ 10 mm
M5x52	15 kg	20 kg	-	30 kg	30 kg
M6x52	15 kg	20 kg	-	30 kg	30 kg
Pirat Skippi-S	Gypsum plasterboard 9.5 mm	Gypsum plasterboard 12.5 mm	Gypsum plasterboard 2x 12.5 mm	Gypsum fibreboard 12.5 mm	Wood chip / plywood board ≥ 10 mm
M5x52	15 kg	20 kg	-	30 kg	30 kg
M6x52	15 kg	20 kg	-	30 kg	30 kg
Pirat Skippi-O	Gypsum plasterboard 9.5 mm	Gypsum plasterboard 12.5 mm	Gypsum plasterboard 2x 12.5 mm	Gypsum fibreboard 12.5 mm	Wood chip / plywood board ≥ 10 mm
M5x52	15 kg	20 kg	-	30 kg	30 kg

- For fixings in gypsum plasterboards, the holding value specifications of the board manufacturer must always be observed
- Approved plugs must be used for fixings where safety is of importance (see also www.tox.de/safety+loads)

Description & Area of Application

- Galvanised metal cavity plug with cap, anti-rotation locks and metric threaded hook
- Galvanised metal cavity plug with cap, anti-rotation locks and short metric eye or round threaded hook



Processing & Installation

- If necessary, the rotation locks can be pressed back into their original shape (e.g. for tiles)
- Observe minimum cavity depth and board thickness
- Pre-positioned installation

