


Profile connection screws DRY PV / PV BS

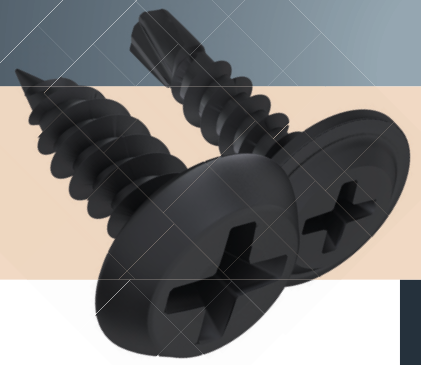

Pan head

- low-profile with high pull-through values

Sharp needle tip

- for fast bite and easy installation in metal substructures up to 0.8 mm

PH2 drive

- the standard in drywall construction

Fine thread / black phosphated

- good grip in metal profiles
- high corrosion protection

Flange head

- low-profile with high pull-through values

Drill tip

- for easy installation in metal profiles up to 2.2 mm



Features

- High ease of installation
- Phosphated surface
- Flat head



PH



1 x incl.

Pack	Item No.	Type D x L	Content	Ø	Length	Drive	Bit included	Approval
------	----------	------------	---------	---	--------	-------	--------------	----------

Profile Connection Screws

DRY PV	mm	per pack	mm	mm	+		ETA
--------	----	----------	----	----	---	--	-----

142883213513	3.5 x 13	1000	3.5	13	PH 2	✓	-
--------------	----------	------	-----	----	------	---	---



Profile Connection Screws – Drill Tip

DRY PV BS	mm	per pack	mm	mm	+		ETA
-----------	----	----------	----	----	---	--	-----

142883214216	4.2 x 16	500	4.2	16	PH 2	✓	-
--------------	----------	-----	-----	----	------	---	---




Description & Area of Application

High corrosion protection thanks to black phosphating


Tested by 48h salt spray test

For connecting C profiles or metal sheets

DRY PV BS:
version with drill tip for especially thick profiles up to 2.2 mm

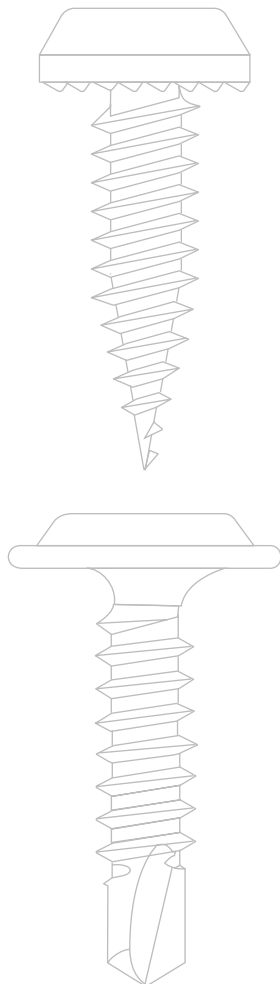

Sharp
needle tip

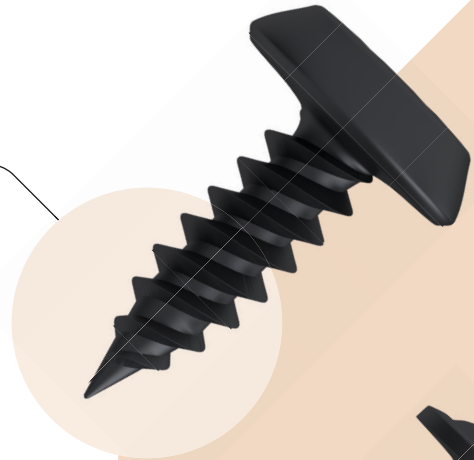

Drill tip

